



PRODUCT CATALOG
2022

REDUCE >> REUSE >> RECYCLE

MB CRUSHER: ADVANCED, VERSATILE, TOUGH.

For over 20 years **MB CRUSHER** has been studying and **manufacturing** machinery compatible to heavy equipment regardless of size. Perseverance and versatility led the company to invent the first jaw crusher for excavators. Investing in technology research contributed to the development of MB's products that can be installed to any carrier machine, turning them into real mobile crushers while improving the machine's performance and allowing companies to use the resources available on their job sites. **MB CRUSHER** has evolved over the years and has become the **benchmark for the construction equipment industry around the world** today. With a full range of products to give companies the solutions they are looking for.



MB CRUSHER HAS SOLUTIONS FOR EVERY CARRIER MACHINE

Crusher buckets, screening buckets, shafts screeners, drum cutters, sorting grapples. **MB CRUSHER** provides professionals with the widest range of attachments capable of **making construction sites** of any size **autonomous and competitive** regardless of the job's nature and scope of action. All of MB CRUSHER's equipment was designed to solve **all kinds of obstacles**, even the most extreme. From skid steers, backhoes, telehandlers, mini and midi excavators, from 1,3 ton (2,866 lb) machines to excavators weighing 70 ton (154,300 lb); **there will be a suitable MB CRUSHER unit**. Installation is straightforward and quick, whether it's for the larger machines in the MB range or the small ones.

GUARANTEED PRODUCTS AND CERTIFIED QUALITY

Guaranteeing a safe product that is compliant with international regulations is essential for everyone at MB CRUSHER. All aspects (from assembly to the finished product) are constantly certified, in order to meet the markets' needs and to **guarantee** the customer receives a product that **is accredited for its exceptional quality**.

100% MADE IN ITALY

MB CRUSHER is an **Italian company** with a worldwide presence. All of the equipment's production phases take place at the headquarters in Fara Vicentino. More than 45.000 square meters (484,400 sq ft) host research and design laboratories, production departments, and sales and administrative offices. Here, every piece of equipment is designed, assembled and distributed to international markets by more than **200 people**. Brazil, China, France, Germany, Japan, India, Russia and United States. There are 9 subsidiaries abroad that support the headquarters to promote and distribute the products to all continents. And a network of over 230 dealers help sell MB CRUSHER's products to **over 150 countries**.



Learn more

PRODUCT CERTIFICATIONS

UNI EN ISO 9001	CE
Quality Management Systems	Declaration of conformity
TUV	PCT
Safety requirements certificate	International Patent Protection

PROCESS CERTIFICATIONS

RINA CERTIFICATION

Organization with qualified welding processes and personnel

WITH MB CRUSHER YOU CRUSH IT EVERY TIME.

ONE ATTACHMENT TO WORK FASTER
AND SAVE MONEY.



WATCH THE VIDEO

With
MB

8
MINUTES

Is how long it takes **FOR MB CRUSHER** to transform the material.

1
ATTACHMENT

This is why MB CRUSHER's units are used on many job sites around the world. Because it **replaces 3 machines** with **one unit**.



The jobsite becomes **environment-friendly**:
-less CO₂
-eliminate landfill disposals
-reduce pollution emissions from vehicles transporting **material**.

Without
MB

4
HOURS

is the average time to process 19,841 pounds of material **WITHOUT** MB CRUSHER.

3
VEHICLES INVOLVED

3 are the machines involved to collect, transport and process materials **WITHOUT** MB CRUSHER.



BEFORE/AFTER

MB CRUSHER'S IMPACT ON DIFFERENT MATERIALS

BUILDING OR CONSTRUCTION MATERIALS

Demolition waste
Excavated soil
Asphalt

Reinforced concrete
Bricks



ORGANIC MATERIALS

Foliage
Sand and soil



WASTE

Garbage
Nylon and plastic
Bituminous waste

Glass
Ceramics



MB CRUSHER units transform waste directly on the job site and allow you to autonomously recover and recycle material.



ROCKS

Coal
Porphyry
Limestone
Granite
Basalt


Marble
River Stone
Calcium carbonate-gypsum



FOUNDRY WASTE AND METALS

Casting mold waste and slag
Foundry sand
Copper slag

Iron
Steel and aluminum slag

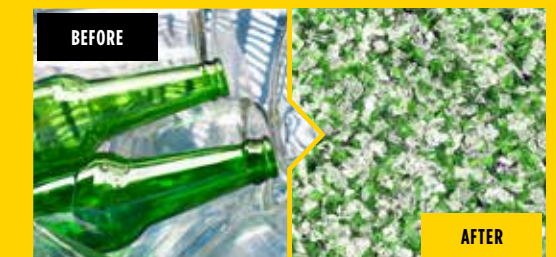

POLES AND COLUMNS

Concrete slabs
Concrete pipes
Gratings

Vineyard poles
Light poles
Railway sleepers



DON'T SEE YOUR MATERIAL?

CONTACT US



MB CRUSHER BUCKETS



DISCOVER

FOR EXCAVATORS,
BACKHOES, LOADERS
AND SKID STEERS

≥ 6,920 lb



REDUCED VIBRATION

Control devices reduce vibration on the arm of the carrier machine.



EASY MAINTENANCE

Quick and easy maintenance: no oil change required.



WIDE MOUTH OPENING

Widest crusher mouth opening per weight of the equipment, available on the market.



HYDRAULIC PROTECTION

The latest hydraulic system extends and protects the life of the excavator.



LOW NOISE

The frame is designed to minimize noise and vibration while crushing.



GUARANTEED OUTPUT SIZE

Regular output size is guaranteed even with worn out jaws.



OPTIMAL DESIGN

Designed to pick up and process material with ease while guaranteeing quality and increased production rates.

The patented jaw crushers turn any earth moving machine into a real crusher.

MB CRUSHER's range of crusher buckets is the largest in the world with **over 90% world market share**.

AREAS OF APPLICATION



ENCLOSED SPACES



TUNNELS



FOREST MAINTENANCE



FOUNDRIES



DEMOLITIONS



ROAD WORK



RECYCLING AGGREGATES



URBAN CONSTRUCTION SITES



PIPELINES



QUARRIES



MINES

MB CRUSHER BUCKETS



DISCOVER

FOR EXCAVATORS
AND BACKHOE
LOADERS


≥ 15,430 lb



Installed on heavy equipment, MB's jaw crushers transform waste into ready-to-use material in a single crushing phase. They are versatile and high-performing machines, created to meet the needs to crush materials in quarries, landfills, urban and non-urban construction sites regardless of the location's size.



DIMENSIONS

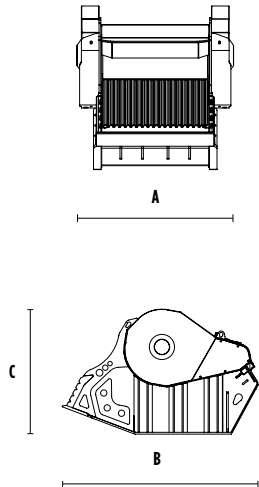

MODELS

MODELS










		UNITS	MB-C50 S4	BF60.1 S4	BF70.2 S4	BF80.3 S4	BF90.3 S4	BF120.4 S4	BF135.8	BF150.10
 	Recommended excavator	lb	≥15,430 ≤22,050	≥22,050 ≤39,700	≥35,300 ≤55,100	≥40,790 ≤63,940	≥46,300 ≤70,550	≥66,140 ≤99,210	≥94,800 ≤176,370	≥154,320 ≤220,460
	Recommended backhoe loader	lb	*≥17,650 ≤19,850	-	-	-	-	-	-	-
	Weight	lb	1.653,00	3.637,00	5.071,00	6.614,00	7.716,00	10.582,00	16.535,00	23.149,00
	Load capacity	cy	0,20	0,72	0,85	0,92	1,18	1,70	2,09	3,00
	Pressure	PSI	> 2,901	> 3,191	> 3,191	> 3,191	> 3,191	> 3,191	> 3,336	> 3,336
	Back pressure	PSI	< 145	< 145	< 145	< 145	< 145	< 145	< 145	< 145
	Oil flow rate**	gal/min.	> 24 < 34	> 32 < 48	> 40 < 53	> 40 < 58	> 48 < 63	> 50 < 69	> 85 < 100	> 100 < 114
	Mouth width	in	21	24	29	33	36	47	51	57
	Mouth height	in	10	20	20	20	21	21	24	28
	Size A	in	39	39	45	51	53	64	74	82
Size B	in	49	69	79	81	86	84	115	140	
Size C	in	30	43	47	55	55	55	67	81	

PRODUCTIVITY

CRUSHING OUTPUT ADJUSTMENT	1 in	15 mm	cy/h	5	9	12	13	16	20	-	-
		20 mm	cy/h	6	10	13	14	17	21	-	-
		30 mm	cy/h	8	12	16	17	20	25	-	-
	2 in	40 mm	cy/h	10	14	18	20	23	29	51	-
		50 mm	cy/h	12	15	21	22	26	32	57	-
		60 mm	cy/h	13	17	24	25	29	36	62	-
	3 in	70 mm	cy/h	-	19	26	27	32	40	68	-
		80 mm	cy/h	-	21	29	30	36	43	74	-
		90 mm	cy/h	-	22	31	33	39	47	80	-
	4 in	100 mm	cy/h	-	24	34	35	42	51	86	-
		110 mm	cy/h	-	26	37	38	45	54	92	96
		120 mm	cy/h	-	27	39	41	48	58	97	100
	5 in	130 mm	cy/h	-	30	41	43	51	62	103	108
		135 mm	cy/h	-	-	-	44	54	64	106	110
		140 mm	cy/h	-	-	-	-	55	65	109	115
	6 in	145 mm	cy/h	-	-	-	-	-	69	112	119
		150 mm	cy/h	-	-	-	-	-	-	115	124
		7 in	200 mm	cy/h	-	-	-	-	-	-	157

*rear.
**The hydraulic flow and pressure must meet the required parameters.

To obtain the values in ton/h, multiply the data listed in the table by the specific weight of your material.
These values are indicative only, estimated with materials of medium load capacity.

OPTIONAL ACCESSORIES

24 MONTH WARRANTY



HOURLY METER



IRON SEPARATOR



DUST SUPPRESSION KIT



MB CRUSHER BUCKETS



DISCOVER

FOR EXCAVATORS,
BACKHOES, LOADERS
AND SKID STEERS

≥ 6,920 ≤ 37,500 lb



Mounted on loaders, skid steers, backhoe loaders, mini-excavators and excavators they crush any type of inert material. Despite their compact size, they offer high productivity standards while maintaining unique performance characteristics that MB CRUSHER buckets have. They provide solutions for any needs that arise in small construction sites and particularly tight spaces.



OPTIONAL ACCESSORIES

24 MONTH WARRANTY




HOUR METER




DUST SUPPRESSION KIT



DIMENSIONS



A



B

MODELS

		   					
		UNITS	MB-L120 S2	MB-L140 S2	MB-L160 S2	MB-L200 S2	
	Recommended excavator	lb	≥14,330 ≤26,460	≥15,430 ≤28,660	≥24,250 ≤34,270	≥26,460 ≤37,500	
	Recommended backhoe loader/Loader *	lb	≥11,020 ≤19,850	≥11,020 ≤22,050	≥15,400 ≤24,250	≥15,400 ≤26,460	
	Recommended skid steer loader*	lb	≥9,920 ≤13,230	≥9,920 ≤13,230	≥11,020 ≤15,400	≥13,230 ≤17,650	
	Weight	lb	2,095	2,161	3,197	3,307	
	Load capacity	cy	0,25	0,26	0,46	0,56	
	Pressure	PSI	> 2,901	> 2,901	> 2,901	> 2,901	
	Back pressure	PSI	< 145	< 145	< 145	< 145	
	Oil flow rate**	gal/min.	25	26	29	32	
	Mouth width	in	29	29	43	45	
	Mouth height	in	10	10	10	10	
	Size A	in	48	60	64	80	
	Size B	in	48	48	51	56	
	Size C	in	31	31	33	33	
	PRODUCTIVITY						
OUTPUT ADJUSTMENT		15 mm	cy/h	8	10	12	13
	1 in	20 mm	cy/h	9	12	13	15
		30 mm	cy/h	12	14	17	18
		40 mm	cy/h	14	17	20	22
	2 in	50 mm	cy/h	17	20	23	25
		60 mm	cy/h	18	21	26	29
To obtain the values in ton/h, multiply the data listed in the table by the specific weight of your material. Indicative values only, estimated with the medium toughness of the materials.							
* Verify machine's optimal Operating Capacity. ** The hydraulic flow and pressure values must meet the required parameters.							

MB SCREENING BUCKETS



DISCOVER

FOR EXCAVATORS,
BACKHOES AND
LOADERS

$\geq 13,230 \leq 110,200$ lb



OPTIMAL SIZE

Designed to pick up
and process material
with ease.



CHANGE SCREENING PANELS

quick and easy.



LOADING STRAIN CONTROL SYSTEM

A device that
reduces stress on
the machine while
loading material.



MAINTENANCE

simple, fast, and
centralized.



HIGH PRODUCTION

Thanks to its cone-shaped
basket and ideal depth
and size.



APPLICATION AREAS



MINES



DEMOLITIONS



MAINTAINING LANDSCAPE
AND AGRICULTURAL AREAS



URBAN
CONSTRUCTION SITES



TUNNELS



ROAD WORK



QUARRIES



RECYCLING AGGREGATES



PIPELINES



ENCLOSED SPACES



EXCAVATIONS



FOUNDRIES







FOREST MAINTENANCE



UNDERWATER WORK

DIMENSIONS



MODELS



	UNITS	MB-LS170 S2	MB-LS220 S2	MB-S10 S4	MB-S14 S4	MB-S18 S4	MB-S23
Recommended excavator	lb	-	-	$\geq 13,200$ $\leq 19,850$	$\geq 19,850$ $\leq 44,100$	$\geq 44,100$ $\leq 77,200$	$\geq 77,200$ $\leq 110,200$
Recommended backhoe loader	lb	$\geq 17,650$ $\leq 33,070$	-	$\geq 17,650$ $\leq 19,850$	-	-	-
Recommended loader**	lb	$\geq 17,650$ $\leq 33,070$	$\geq 30,070$ $\leq 55,100$	-	-	-	-
Weight	lb	3,197	6,173	903	2,425	4,409	8,068
Load capacity	cy	1,44	3,14	0,42	1,44	3,14	4,90
Pressure	PSI	$> 2,321$	$> 2,901$	$> 1,886$	$> 2,176$	$> 2,901$	$> 4,641$
Back pressure	PSI	< 580	< 580	< 580	< 580	< 580	< 73
Oil flow rate***	gal/min.	21	32	11	16	32	42
Basket diameter	in	47	63	31	47	63	78
Basket depth	in	35	48	22	35	48	59
Size A	in	73	86	37	55	72	91
Size B	in	66	93	48	67	88	112
Size C	in	54	70	40	57	74	93
Size D	in	47	63	32	47	63	78

* Rear.
** Verify machine's Rated Operating Capacity.
*** The hydraulic flow rate values must be met alongside the required operating pressure.

OPTIONAL ACCESSORIES

24 MONTH WARRANTY



HOURLY METER



BASKET PROTECTION KIT



DUST SUPPRESSION KIT



MB SHAFTS SCREENERS



DISCOVER

FOR EXCAVATORS,
BACKHOES, LOADERS
AND SKID STEERS

≥ 2,870 ≤ 99,210 lb



EASY MAINTENANCE

Simple, fast,
and centralized
maintenance.



HIGH PRODUCTION

The optimal design and
large loading volume
ensures high and optimal
production rates.



MODERATE NOISE EMISSIONS

The frame is
designed to
minimize noise and
vibration.



SHAFTS REPLACEMENT SYSTEM

The process to
replace the shafts
can be executed
directly on site
simply and safely.



AUTOMATIC HYDRAULIC SYSTEM

to protect the engine and
transmission.

Installed on the carrier
machine, they select
materials directly on site.
Ideal for large and small
construction sites.
Thanks to the rotating shaft
kits that can be replaced
right on the job site, you can
process different material
whenever you need to.



APPLICATION AREAS



ROAD WORKS



MINES



QUARRIES



FOUNDRIES



RECYCLING
AGGREGATES



PIPELINES



EXCAVATIONS



MAINTAINING LANDSCAPE
AND AGRICULTURAL AREAS



ENCLOSED SPACES





URBAN
CONSTRUCTION SITES



TUNNELS

DIMENSIONS



MODELS

	UNITS	MB-HDS207		MB-HDS212	MB-HDS214	MB-HDS314	MB-HDS320	MB-HDS323	MB-HDS523
		without capacity increase kit	with capacity increase kit						
Recommended excavator	lb	≥ 2,870 ≤ 6,170	≥ 3,750 ≤ 6,610	≥ 11,020 ≤ 22,050	≥ 19,850 ≤ 28,660	≥ 26,460 ≤ 44,100	≥ 39,690 ≤ 52,910	≥ 48,500 ≤ 77,200	≥ 66,140 ≤ 99,210
Recommended backhoe loader	lb	-	-	* ≥ 17,650 ≤ 19,850	-	-	-	-	-
Backhoe loader/Loader** recommended	lb	-	-	-	≥ 17,650 ≤ 28,660	≥ 19,850 ≤ 30,860	≥ 24,240 ≤ 30,860	≥ 26,460 ≤ 35,270	-
Recommended skid steer loader**	lb	-	-	≥ 6,610 ≤ 8,820	≥ 8,820 < 22,050	-	-	-	-
Weight	lb	216	250	1,058	1,807	3,086	4,629	5,291	7,386
Load capacity	cy	0,07	0,08	0,20	0,52	1,18	1,77	2,16	2,62
Pressure	PSI	> 2,900	> 2,900	> 2,900	> 2,900	> 3,336	> 3,626	> 3,626	> 3,626
Oil flow rate***	gal/min.	7	7	≥ 20 ≤ 26	20	26	32	32	61
Size A	in	29	30	48	54	56	81	92	92
Size B	in	21	23	32	44	53	53	59	59
Size C	in	19	19	28	37	49	49	49	64

* Rear.

** Verify machine's Rated Operating Capacity.

*** The value of the hydraulic flow rate must be reached alongside the required operating pressure.

OPTIONAL ACCESSORIES

24 MONTH
WARRANTY



LOAD CAPACITY
INCREASE KIT*



SHAFT
HOLDER



SHAFT
KIT

PAGE
20

*available only for MB-HDS207 model

MB DRUM CUTTERS



DISCOVER

FOR EXCAVATORS
AND SKID STEER
LOADERS

≥ 7,700 ≤ 77,200 lb



REPLACING THE DRUMS

The drum heads can be replaced directly on the job site.



SUBMERSION

Suitable for **underwater** work.



LESS VIBRATION

Equipped with the **no torsion system** that reduces transverse stress on the arm of the excavator.



RELIABLE

Devices available to reduce the excavator's oil temperature during heavy use.



STRONGER

Equipped with **power boost** to evenly distribute the power to the rotary cutter that needs more force.



DURABLE

Equipped with **wear-resistant plates** to protect the central body.


Ideal for applications that require you to grind compact materials efficiently and accurately. They are the only drum cutters on the market that feature the Direct Drive Twin Motor System, which distributes the force of two drums according to the power required.



APPLICATION AREAS



DIMENSIONS

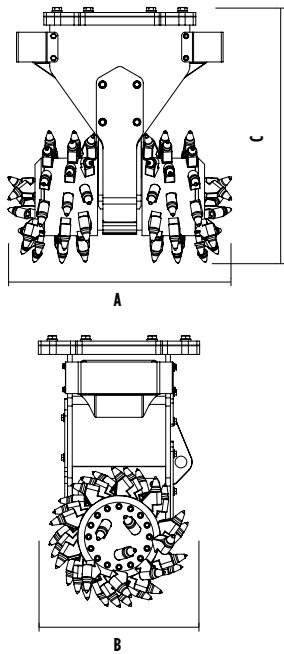

MODELS

	UNITS	 MB-R500	 MB-R700	 MB-R800	 MB-R900
 Recommended excavator	lb	≥ 7,700 ≤ 24,200	≥ 13,200 ≤ 28,600	≥ 22,050 ≤ 48,500	≥ 41,900 ≤ 77,200
 Recommended skid steer loader*	lb	≥ 7,700 ≤ 13,200	≥ 13,200 ≤ 22,050	-	-
Cutting width	in	18	35	40	44
Pick force	N	14,456	14,456	25,003	29,502
Speed/Min. (min/max)	rpm	80/120	80/110	60/80	60/80
Output torque	Nm	5,000	5,000	10,000	13,200
Pressure	PSI	> 5,076	> 5,076	> 5,076	> 5,076
Back pressure	PSI	< 58	< 58	< 58	< 58
Weight	lb	661	1,323	2,205	3,086
Oil flow rate**	gal/min.	16-32	29-48	53-79	66-92
Drum diameter	in	20	20	24	27
Size A	in	20	35	40	44
Size B	in	20	20	24	27
Size C	in	32	37	44	54

* Verify machine's Rated Operating Capacity.
** The hydraulic flow rate values must be met alongside the required operating pressure.

OPTIONAL ACCESSORIES

24 MONTH
WARRANTY



INTERCHANGEABLE
DRUM KIT
(LOW-SET / FULL-SET)



ROCK AND ASPHALT
PICK KITS



DUST
SUPPRESSION KIT



DRUM
COVER KIT**



CUTTING DEPTH
ADJUSTMENT KIT**



*CUTTER BODY
ROTATION KIT**
*needs rotation system



POWER
TRANSMISSION
KIT**



**only available for MB-R500 model

MB SORTING GRAPPLES



DISCOVER

FOR
EXCAVATORS

≥ 13,200 ≤ 66,10 lb



COUPLING SYSTEM

Inclined coupling system increases the attachment's reach.



SAFE

Equipped with a **safety valve** that prevents the claws from opening in case of pressure loss.



LOW NOISE EMISSIONS

thanks to the silent blocks.



REPLACEABLE BLADES

The reversible and double-sided blades can be replaced on site.



ACCESSORIES

Equipped with accessories that allow the grapples to be utilized on various application areas.

Designed to select and handle any type of solid material. Thanks to the interchangeable claws and the 360° rotation, the grapples can handle large loads and odd shapes.



AREAS OF APPLICATION



ROAD WORK



MINES



QUARRIES



DEMOLITIONS



FOREST MAINTENANCE



PIPELINES



TUNNELS



MAINTAINING LANDSCAPING AND AGRICULTURAL AREAS





ENCLOSED SPACES



URBAN CONSTRUCTION SITES

DIMENSIONS

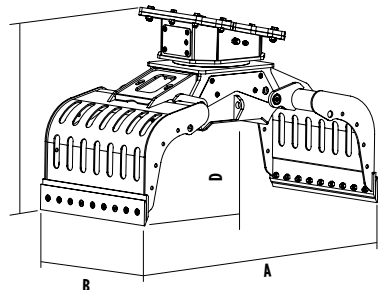

MODELS



	UNITS	MB-G350 S4	MB-G450 S4	MB-G600 S4	MB-G900 S4	MB-G1000 S4	MB-G1200 S4	MB-G1500 S4
Recommended excavator	lb	≥ 2,850 ≤ 5,750	≥ 6,600 ≤ 13,200	≥ 13,200 ≤ 26,460	≥ 26,460 ≤ 39,700	≥ 39,700 ≤ 55,100	≥ 39,700 ≤ 66,140	≥ 44,100 ≤ 66,140
Weight	lb	187	635	1.323	1.720	3.561	3.637	4.520
Capacity (claws closed)	cy	0,04	0,13	0,38	0,56	0,58	0,93	1,87
Rotation	Degrees	360°	360°	360°	360°	360°	360°	360°
Oil pressure (rotation)	PSI	> 2,175	> 2,175	> 2,321	> 2,321	> 3191	> 3,191	> 3,191
Oil flow rate (rotation)	gal/min.	1,3	2,6	4 - 8	4 - 8	11 - 19	5 - 9	5 - 9
Oil pressure (opening/closing)	PSI	0 - 2,901	0 - 3,626	2,901 - 4,351	2,901 - 4,351	4,351 - 5,802	4,351 - 5,802	4,351 - 5,802
Oil flow rate (opening/closing)	gal/min.	4	11	7	8	19	19	19
Size A	in	31	51	73	73	71	83	97
Size B	in	14	19	26	36	40	49	60
Size C	in	22	34	46	46	55	57	67
Size D	in	9	17	21	21	21	23	32
Size E	in	19	30	39	39	46	47	54
Size F	in	36	38	54	54	59	65	79
Size G	in	11	20	29	29	25	32	44

OPTIONAL
ACCESSORIES

PAGE
21

SHAFT KIT

FOR SHAFT SCREENERS Page 14-15



RQ15**/RQ20/RQ50 SIFTING KIT


ADJUSTMENT*	0.6/0.8/2.0 in
APPLICATION	Sifting damp/dry soil Soil aeration

* shafts in closed position
** available for MB-HDS207 model only



RM MIXER KIT


APPLICATION	Soil Aeration Compost Aeration Breaking down charcoal Crushing glass Crushing drywall
-------------	---



RC COMPOST KIT

SETTINGS*	1.4 in
APPLICATION	Shredding foliage and small branches Composting

* shafts in closed position



RE8/RE16 FINE SIFTING KIT

SETTINGS*	0.3/0.6 in
APPLICATION	Sifting damp/dry soil

* shafts in closed position

OPTIONAL ACCESSORIES

Page 18-19 FOR SORTING GRAPPLERS

ELECTRICAL KIT FOR 2 HOSE FUNCTIONALITY

Utilize the 360° rotation even with excavators that only have two hoses.



REMOTE POWER CONTROL SYSTEM

Managing the claws' closing force directly from the cabin.



ROTATION POWER EXTENDER KIT

To duplicate the grapple's rotational force and allow you to handle heavy materials with ease.



SERRATED SIDE PLATE KIT

For handling material of particular shapes.



MULTI-PURPOSE BLADE KIT

For handling material of particular shapes.



24 MONTH WARRANTY



RUBBER PROTECTION KIT

To handle blocks made of delicate materials.



CLAM SHELL KIT

For picking up and moving small material.




GRIP IMPROVEMENT KIT

To easily handle materials of particular weights and shapes, better grip and more control.



SHAFTS EASILY
REPLACEABLE ON SITE



SMART REMOTE CONTROL

With **MB CRUSHER'S** cutting-edge solution, you can **monitor your attachment** in real time and **trace its use and overall condition**.



SMARTER



SAFER AND MORE COMPETITIVE



EASIER TO USE

ONLY AVAILABLE ON SELECT MODELS

MB CRUSHER WORLDWIDE



MB S.p.A. (Headquarters)

Via Astico, 30/A - 36030 Fara Vicentino (VI) Italia
 ☎ +39 0445 308148
 ☎ +39 0445 308179
 ✉ info@mbcrusher.com



MB S.p.A. (Production)

Via Astico, 30 - 36030 Fara Vicentino (VI) Italia
 ☎ +39 0445 850425
 ☎ +39 0445 850335
 ✉ info@mbcrusher.com



MB S.p.A. (Logistic center)

Via Astico, 34 - 36030 Fara Vicentino (VI) Italia
 ✉ shipping@mbcrusher.com



MB DEUTSCHLAND GMBH

Linprunstraße 49, D-80335 München (Hauptsitz)
 Im Greut 10, 72406 Bisingen (Zentrallager)
 ☎ 08007237174
 ☎ +49 (0) 74789290529
 ✉ info@mbcrusher.de



MB JAPAN株式会社

〒352-0023 埼玉県新座市堀ノ内1-5-35 (本店)
 〒650-0024 兵庫県神戸市中央区海岸通5
 商船三井ビル617 (神戸支店)
 ☎ 0800-100-5458
 ☎ 048-423-2298
 ☎ 048-611-7865
 ✉ info@mbcrusher.jp



MB FRANCE SARL

320 Rue Saint Honoré - 75001 Paris (Siège social)
 71 Rue Jean Zay - 69800 Saint Priest (Bureaux commerciaux)
 ☎ 0800907761
 ☎ +33 04 26074292
 ✉ info@mbfrance.fr



MB SHANGHAI 磨宝商贸 (上海) 有限公司

上海市新龙路1333弄25幢310室, 邮编 201101
 Rm 310, Bldg.25, 1333 Lane, Xinlong Rd, Minhang Dist.,
 Shanghai 201101, P.R.China
 ☎ +86 21 543 76037
 ✉ info@mbcrusher.cn



MB RUS 000 «МБ РУС»

127030, г. МОСКВА, ул. СУЩЕВСКАЯ, д. 21, ЭТАЖ 5,
 ПОМЕЩ./ОФИС 1/502 (головной офис)
 620049, Екатеринбург, пер. Автоматики, д.3
 (обособленное подразделение)
 ☎ 8-800-100-94-37
 ✉ info@mbcrusher.ru



MB AMERICA, INC.

8730 Technology Way, Reno, NV 89521, (Headquarters)
 1203 E. Mountain St., Kernersville, NC, 27284 (Branch Office)
 ☎ 855 MB CRUSH (855 622 7874)
 ☎ 775 853 1058
 ☎ 775 455 4196
 ✉ info@mbamerica.com



MB CRUSHER INDIA PVT. LTD.

Office No. C, 1st Floor, D Building, MBC Park,
 Near Hypercity Mall, Kasarwadavali, Thane - West, Thane -
 400615, Maharashtra
 ☎ +91 22 4970 6759
 ✉ info@mbcrusher.in



MB CRUSHER DO BRASIL Comercio de equipamentos Ltda

Av. Paulista, 2006 CJ 410 - 01310-200
 São Paulo SP Brasil
 ☎ +55 11 3266-3231
 ✉ info@mbcrusher.com.br



HARDOX®

COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001:2015 =



WWW.MBCRUSHER.COM

