

CONTRACT CHANGE ORDER NO. 2
RSMH STREET RECONSTRUCTION - PHASE II
OWNER: CITY OF SEGUIN
CONTRACTOR: ATLAS CONSTRUCTION, CORP.
CONTRACT AMOUNT: \$5,918,531.00



Item No.	Item Description	Contract Quantity	Units	Unit Price	Proposal Amount	Contract Quantity + Increase (-) Decrease	Unit Price + Increase (-) Decrease	Amount + Increase (-) Decrease
P.9	Unclassified Excavation/Subgrade Preparation	22,253	S.Y.	\$10.00	\$222,530.00	418		\$4,180.00
P.10	Geogrid	20,308	S.Y.	\$4.00	\$81,232.00	404		\$1,616.00
P.11	4" Type D Hot Mix Asphaltic Concrete	17,519	S.Y.	\$18.00	\$315,342.00	388		\$6,984.00
P.12	15" Crushed Limestone Flexible Base Material	21,615	S.Y.	\$14.00	\$302,610.00	418		\$5,852.00
P.13	2' wide x 1' deep Concrete Curb & Gutter	10,016	L.F.	\$30.00	\$300,480.00	40		\$1,200.00
P.20	5" Concrete Sidewalk	1,793	S.Y.	\$125.00	\$224,125.00	1.6		\$200.00
P.89	18" RCP Storm Sewer	23	L.F.	\$200.00	\$4,600.00	76		\$15,200.00
P.90	24" RCP Storm Sewer	537	L.F.	\$125.00	\$67,125.00	202		\$25,250.00
P.91	30" RCP Storm Sewer	34	L.F.	\$200.00	\$6,800.00	157		\$31,400.00
P.107	Storm Drain Manhole (TxDOT 5x4 precast base)	1	EA.	\$6,500.00	\$6,500.00	2		\$13,000.00
P.110	TxDOT Curb Inlet Type PCO (Y = 4')	4	EA.	\$4,500.00	\$18,000.00	7		\$31,500.00
P.114	TxDOT Precast Slab Lid Style FG (3X5)	1	EA.	\$2,500.00	\$2,500.00	1		\$2,500.00
P.115	24" Plug	5	EA.	\$1,500.00	\$7,500.00	5		\$7,500.00
P.131.	Tree Protection	38	EA.	\$500.00	\$19,000.00	(8)		(\$4,000.00)
P.132.	Curb Inlet Protection	400	L.F.	\$25.00	\$10,000.00	87		\$2,175.00
P.135.	Seeding (hydro-mulching)	6,963	S.Y.	\$5.00	\$34,815.00	360		\$1,800.00
NET CONTRACT INCREASE								\$146,357.00

This change order includes additional drainage inlets and pipes at Bismark Street, Krezdorn Street, Hackberry Street, College Street, Elm Street, Ireland Street and Walnut Street. Additional pavement and curb and gutter was added at the intersections of College Street and Ireland Street.

THE NET INCREASE IN THE CONTRACT AMOUNTS TO \$146,347.00, WHICH MAKES THE NEW ADJUSTED CONTRACT TOTAL \$6,064,888.00. THIS WILL BECOME A SUPPLEMENT TO THE CONTRACT AND ALL PROVISIONS WILL APPLY HERETO.

Douglas G. Faseler, City Manager
City of Seguin

Date

CONTRACT CHANGE ORDER NO. 2
RSMH STREET RECONSTRUCTION - PHASE II
OWNER: CITY OF SEGUIN
CONTRACTOR: ATLAS CONSTRUCTION, CORP.
CONTRACT AMOUNT: \$5,918,531.00




Joe Ramos, P.E.
City of Seguin

Date

Matt Pekar, Project Manager
City of Seguin


Date



K. Beau Perry, P.E.
TRC Engineers, Inc.



Date

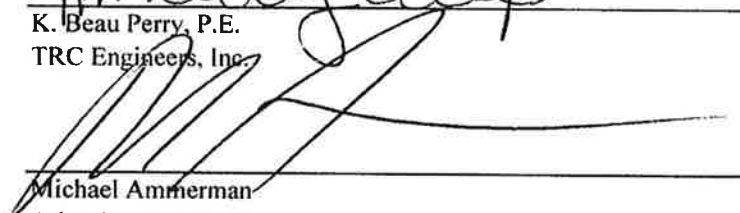

Michael Ammerman
Atlas Construction, Corp.



Date